ISITEEK™

INTRODUCING ISITEEK

Isiteek is a D-I-Y decking solution that's a great way to get the look of a teak deck.

Explore the possibilities of creating your own deck at home with Isiteek.

Designed with safety in mind, Isiteek is not only a non-slip surface but also fire-resistant.

Isiteek is 100% recyclable, and has been created to be simple to create and install on your boat.

Our comprehensive installation resources will help you get started.

DIY DECK

A cost-effective alternative to get the look and underfoot feel of a synthetic teak deck at a fraction of the cost.

FOUR WINNS

THE BENEFITS OF AN ISITEEK DECK

ISITEEK is where beautiful decking meets DIY.

It has been designed to cope in all weather conditions.

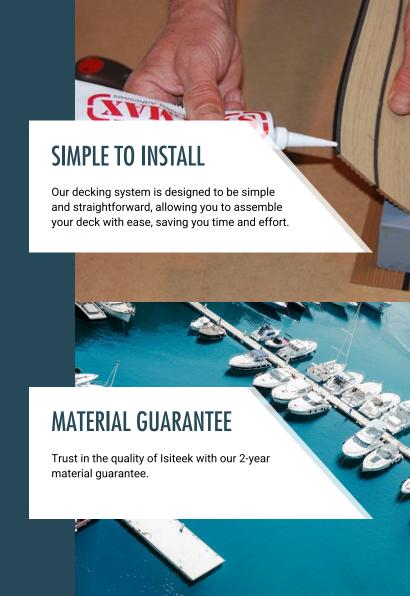Isiteek is protected by the Flexiteek patents.

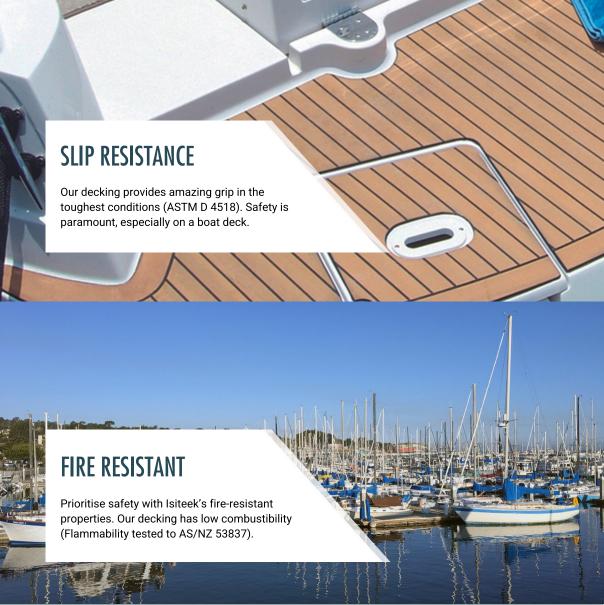It's trusted by boat owners all over the world.

A simple installation video and guide are available to help you get started.

Isiteek is a hardwearing and long lasting decking solution.

It's a great way to get the look of a teak deck for even the smallest boat.

You can find out more and get started at www.isiteek.com.

SIMPLE TO INSTALL

Our decking system is designed to be simple and straightforward, allowing you to assemble your deck with ease, saving you time and effort.

MATERIAL GUARANTEE

Trust in the quality of Isiteek with our 2-year material guarantee.

SLIP RESISTANCE

Our decking provides amazing grip in the toughest conditions (ASTM D 4518). Safety is paramount, especially on a boat deck.

FIRE RESISTANT

Prioritise safety with Isiteek's fire-resistant properties. Our decking has low combustibility (Flammability tested to AS/NZ 53837).

ISITEEK DOUBLE PLANK

The foundation of the Isiteek decking collection is the double plank, which forms the essential structure of the deck.

The 2×45 boasts a double plank design, incorporating a tongue and groove system for convenient gluing.

Additionally, its co-extruded caulk line, available in black or white, spans the material thickness and runs consistently throughout the profile.

The profile itself is 90mm wide, composed of two 40mm planks separated by 5mm caulk lines.

ISITEEK 2x45 PB

ISITEEK 2x45 PW

ISITEEK MARGIN BOARDS

If you prefer having margin boards around your panel.

The 60MB/60MW features a white or black co-extruded caulk line that runs down the edge of the profile and can be bent around a radius. For sharper curves, opt for the 125 KP.

The 60 MW is 60mm wide, comprising a 55mm plank and a 5mm caulk line.

ISITEEK 60 MB

ISITEEK 60 MW

ISITEEK KING PLANK

Use the 125 KP when the radius is too sharp for 60 MW/MB.

It is a wide solid plank without caulking lines, with a profile width of 125mm, supplied as a 2m roll, covering 0.33m² per product.

YOU WILL ALSO NEED

STELMAX

Use Stelmax to bond the Isiteek profile together to form a panel.

ROLLER CRANE 333

Use the Crane 333 roller to roll along the planks, expel the air, eliminate air bubbles, and ensure even and total contact.

ISITEEK CAULKING ADHESIVE

Use the Isiteek caulking adhesive to bond the Isiteek panel.

Pack Specification: Each package contains 310 ml. Colors available: black and white.

CREATE A DECK IN THREE SIMPLE STEPS

The installation of Isiteek is simple and straightforward.

TEMPLATE YOUR DECK

Create a deck template using a suitable paper.

BUILD YOUR DECK

Start to create your decking to fit your template.

INSTALL YOUR DECK

Apply your assembled panels to your boat.

PERFECT FOR A BOAT LIKE YOURS...

ISITEEK ™

A Flexiteek Group Product.

FLE**X**ITEEK

Beautifully engineered synthetic decking
and marine products.